
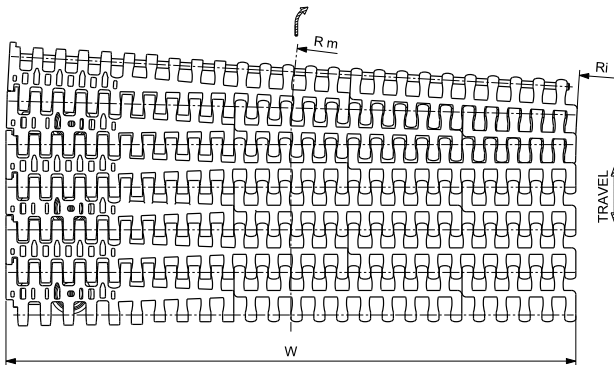
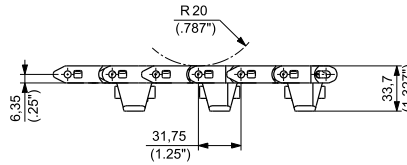
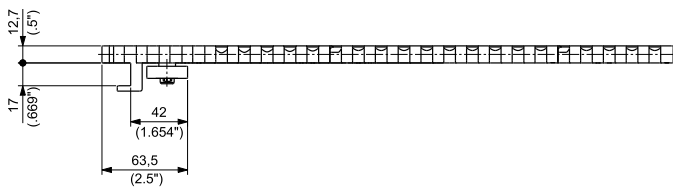


TAB+BEARING
12,7 mm (0.5") THICKNESS
REINFORCED OUTER MODULES
STANDARD SIDEFLEXING RADIUS

For traditional left, right or "U" turn conveying.
 Average ratio between internal sideflexing radius and width = 1.8.
 Guide system with one side TAB+Stainless Steel Bearing (waterproof).

- Belt widths: from 255 mm (10.04") to 850 mm (33.46") in 85 mm (3.35") increments

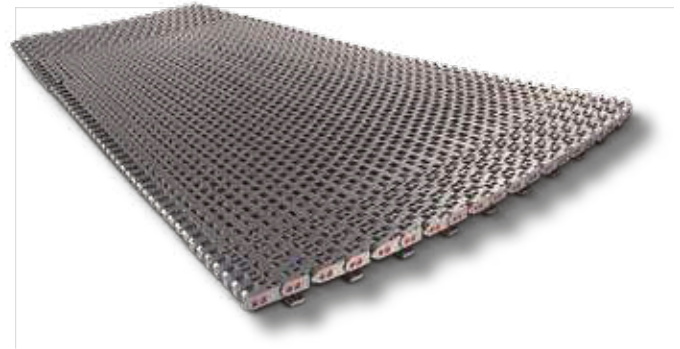

MATERIALS		PART NUMBER	WIDTH W		SIDEFLEXING RADIUS				WEIGHT	
Module	Pin		mm	inch	INNER Ri		MEDIUM Rm		kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	PBT	2556HTB-UP0255	255	10.04	472,5	18.60	600	23.62	3,24	2.18
		2556HTB-UP0340	340	13.39	630,0	24.80	800	31.50	3,97	2.67
		2556HTB-UP0425	425	16.73	787,3	31.00	1000	39.37	4,70	3.16
		2556HTB-UP0510	510	20.08	945,0	37.21	1200	47.24	5,43	3.65
		2556HTB-UP0595	595	23.43	1102,5	43.41	1400	55.12	6,16	4.14
		2556HTB-UP0680	680	26.77	1260,0	49.61	1600	62.99	6,90	4.64
		2556HTB-UP0765	765	30.12	1417,5	55.81	1800	70.87	7,63	5.13
		2556HTB-UP0850	850	33.46	1575,0	62.01	2000	78.74	8,36	5.62



Standard packaging:
 Rollsof 1,524 m (5 ft)