



4650 Series Modular Belt




8,7 mm (0.343") THICKNESS SOLIDTOP

For traditional left, right or "U" turn conveying.

NEW



- Belt widths: from 340 mm (13.39") to 850 mm (33.46") in 85 mm (3.35") increments
- Belt inner radius: from 600 mm (23.62") to 1025 mm (40.35")
- Belt weight: 8,9 kg/m² (1.82 lbs/ft²)

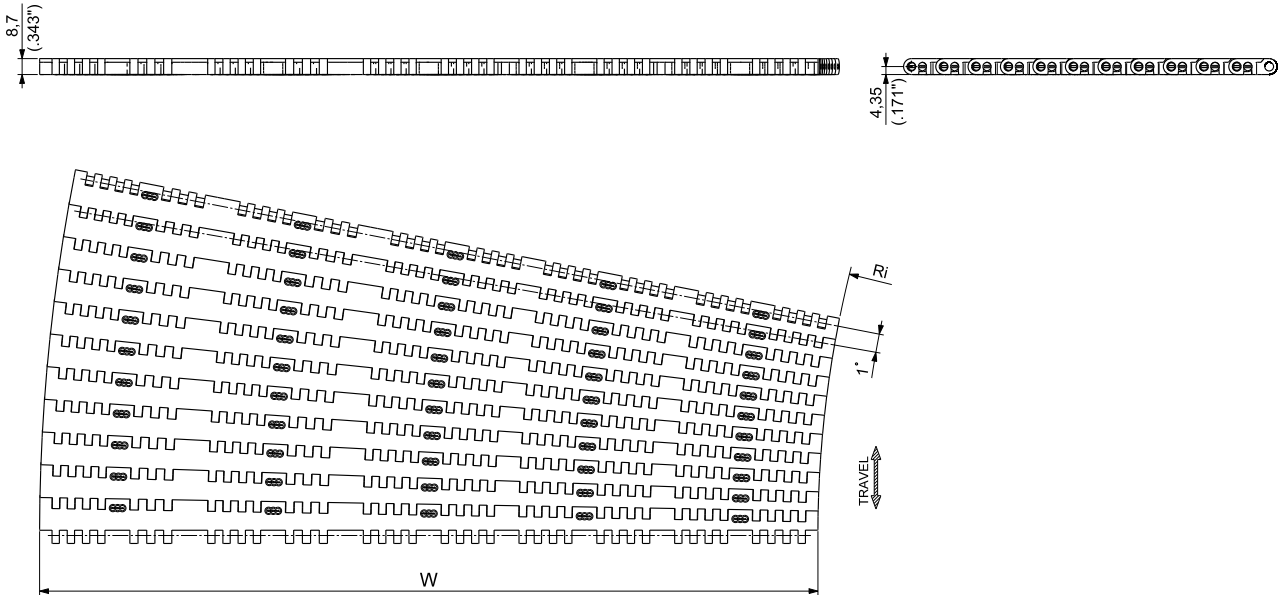

MATERIALS		PART NUMBER	WIDTH W		INNER SIDE FLEXING RADIUS Ri		WORKING LOAD	
Module	Pin		mm	inch	mm	inch	N	Lbs
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	PBT	4650UP0340A01	340	13.39	600	23.62	8500	1,911
		4650UP0425A01	425	16.73	600	23.62	10625	2,388
		4650UP0510A01	510	20.08	600	23.62	12750	2,866
		4650UP0595A01	595	23.43	600	23.62	1875	3,344
		4650UP0680A01	680	26.77	600	23.62	17000	3,822
		4650UP0765A01	765	30.12	600	23.62	19125	4,299
		4650UP0850A01	850	33.46	600	23.62	21250	4,777
		4650UP0340A03	340	13.39	770	23.62	8500	1,911
		4650UP0425A03	425	16.73	770	30.31	10625	2,388
		4650UP0510A03	510	20.08	770	30.31	12750	2,866
		4650UP0595A03	595	23.43	770	30.31	14875	3,344
		4650UP0680A03	680	26.77	770	30.31	17000	3,822
		4650UP0340A06	340	13.39	1025	40.35	8500	1,911
		4650UP0425A06	425	16.73	1025	40.35	10625	2,388