


8,7 mm (0.343") THICKNESS
SOLID TOP

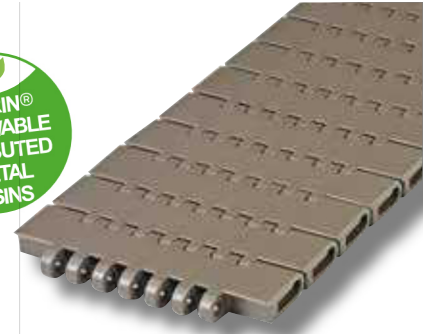


Extremely good flatness, manufacturing accuracy, and low coefficient of friction, make the side transfer of the products very easy.




Completely closed surface, no gap between the modules, even when engaging on the sprockets.

Particularly suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base).

VERSION WITHOUT TRACKING GUIDE

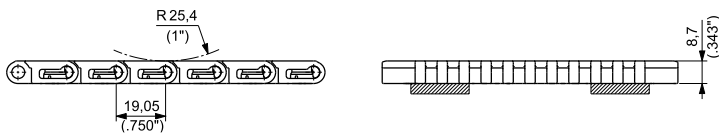

VERSION WITH TRACKING GUIDE

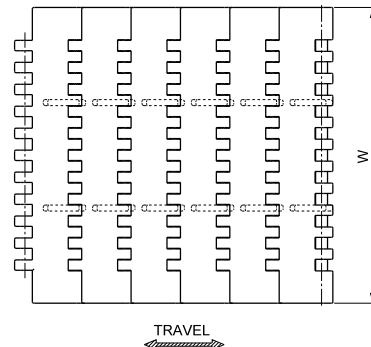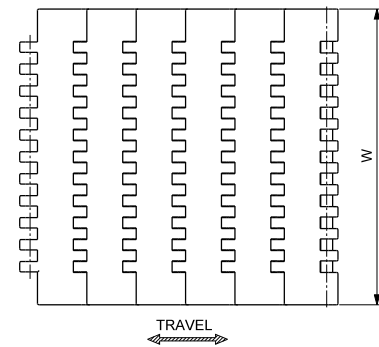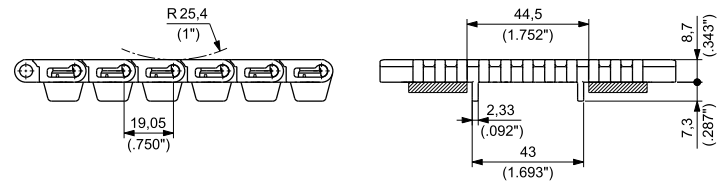


MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT			
Plate	Pin				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft		
ULTRA PERFORMANCE HOMOPOLYMER DELTRIN® UP		WITHOUT TRACKING GUIDE	7300 UP 325	7300UPKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57		
			7300 UP 450	7300UPKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77		
			7300 UP 600	7300UPKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01		
			7300 UP 750	7300UPKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26		
SPECIAL DELTRIN® REINFORCED WITH KEVLAR® DK2 PBT			WITH TRACKING GUIDE	7300 D2K325	7300D2KKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57	
				7300 D2K 450	7300D2KKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77	
				7300 D2K600	7300D2KKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01	
				7300 D2K750	7300D2KKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26	
ECOLOGICAL FRICTION ABATING THERMOPLASTIC E-FAST				WITHOUT TRACKING GUIDE	7300 EF 325	7300EFKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
					7300 EF 450	7300EFKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
					7300 EF 600	7300EFKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
					7300 EF 750	7300EFKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
ULTRA PERFORMANCE HOMOPOLYMER DELTRIN® UP		WITH TRACKING GUIDE			7300G UP 325	7300GUPKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
					7300G UP 450	7300GUPKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
					7300G UP 600	7300GUPKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
					7300G UP 750	7300GUPKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
SPECIAL DELTRIN® REINFORCED WITH KEVLAR® DK2 PBT			WITH TRACKING GUIDE		7300G D2K325	7300GD2KKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
					7300G D2K 450	7300GD2KKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
					7300G D2K600	7300GD2KKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
					7300G D2K750	7300GD2KKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
ECOLOGICAL FRICTION ABATING THERMOPLASTIC E-FAST				WITH TRACKING GUIDE	7300G EF 325	7300GEFKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
					7300G EF 450	7300GEFKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
					7300G EF 600	7300GEFKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
					7300G EF 750	7300GEFKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26





8,7 mm (0.343") THICKNESS SOLID TOP

This belt offers a smooth surface to provide excellent support and minimize product tippage. Particularly suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base).

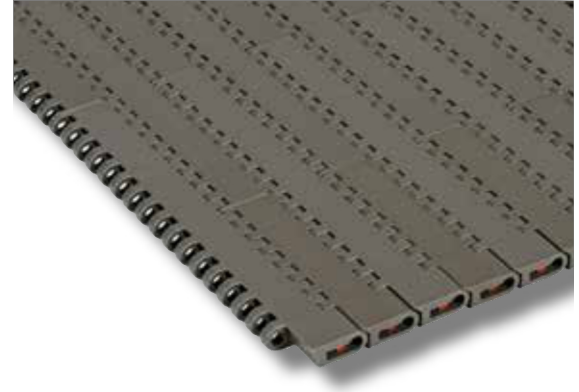

- Belt widths: 228,6 mm (9") or wider in 76,2 mm (3") increments
- Working Load (at 25°C/77°F): 30000 N/m (2,056 lbs/ft) for **UP**, **DK2™** and **e-FAST** materials
- Belt weight: 9,36 kg/m2 (1.92 lbs/ft2) for **UP**, **DK2™** and **e-FAST** materials

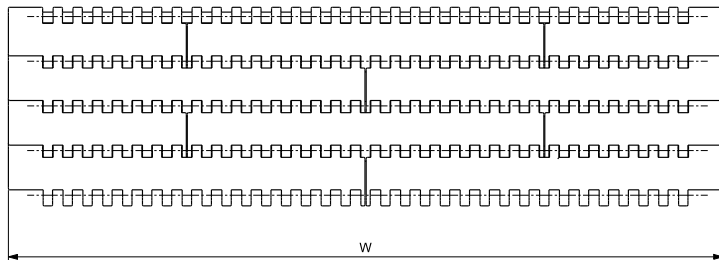

WIDTH W		MATERIALS				Pin
		Module			NEW	
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN®	DK2™ SPECIAL DELRIN® REINFORCED WITH KEVLAR®	e-FAST ECOLOGICAL FRICTION ABATING THERMOPLASTIC		
mm	inch	PART NUMBER	PART NUMBER			
228,6	9	7300UP009	7300D2K009	7300EF009	PBT	
304,8	12	7300UP012	7300D2K012	7300EF012		
381,0	15	7300UP015	7300D2K015	7300EF015		
457,2	18	7300UP018	7300D2K018	7300EF018		
533,4	21	7300UP021	7300D2K021	7300EF021		
609,6	24	7300UP024	7300D2K024	7300EF024		
685,8	27	7300UP027	7300D2K027	7300EF027		
762,0	30	7300UP030	7300D2K030	7300EF030		
838,2	33	7300UP033	7300D2K033	7300EF033		
914,4	36	7300UP036	7300D2K036	7300EF036		
990,6	39	7300UP039	7300D2K039	7300EF039		
1066,8	42	7300UP042	7300D2K042	7300EF042		
1143,0	45	7300UP045	7300D2K045	7300EF045		
1219,2	48	7300UP048	7300D2K048	7300EF048		
1295,4	51	7300UP051	7300D2K051	7300EF051		
1371,6	54	7300UP054	7300D2K054	7300EF054		
1447,8	57	7300UP057	7300D2K057	7300EF057		
1524,0	60	7300UP060	7300D2K060	7300EF060		

Belts wider than 1524 mm (60") are available in 76,2 mm (3") increments. To identify the Part Numbers, please substitute the last three digits of the PN with the desired width. Example: for a 63" wide belt (=60+3 inches) the PN for UP material is 7300UP063".



Standard packaging: Belts are supplied in the length requested by the customer.