



1" Pitch
8,7 mm (0.343") THICKNESS
FLUSH GRID




This belt has an excellent combination of open and support areas to allow drainage of liquids and good support of the conveyed product. This belt is particularly suitable for conveying of aluminium cans.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 21600 N/m (1,480 lbs/ft) for **UP** and **DK2™** materials
 13200 N/m (904 lbs/ft) for **PP** material
- **Belt weight:** 6,58 kg/m² (1.58 lbs/ft²) for **UP** and **DK2™** materials
 4,43 kg/m² (1.35 lbs/ft²) for **PP** material



VERSION WITHOUT TRACKING GUIDE

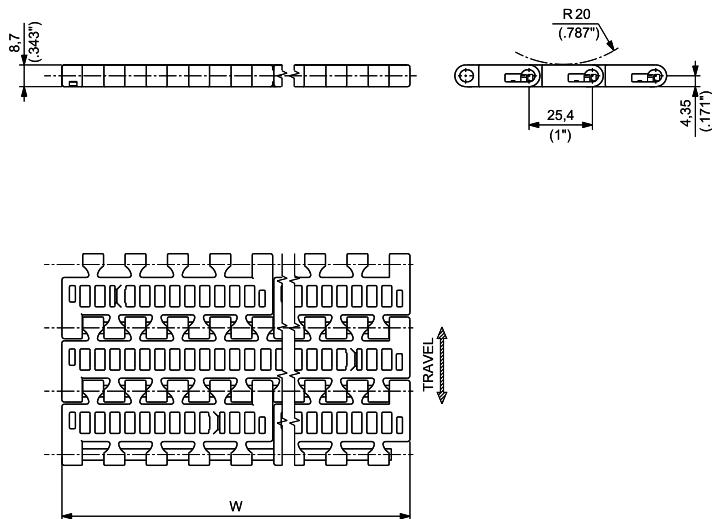

VERSION WITH TRACKING GUIDE

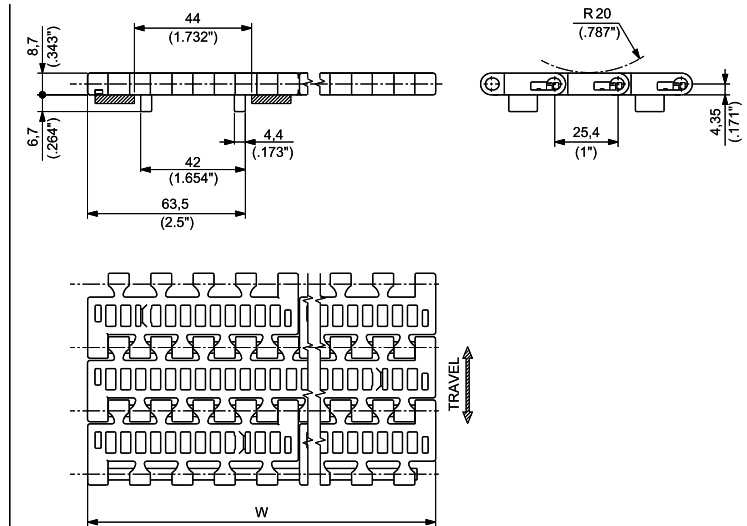

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

WIDTH W		MATERIALS						Pin
		Module						
		UP ULTRAPERFORMANCE HOMOPOLYMER DELRIN®	DK2™ SPECIAL DELRIN® REINFORCED WITH KEVLAR®	PP SPECIAL POLYPROPYLENE ⁽¹⁾				
		PART NUMBER		PART NUMBER		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	1500AUP0085		1500AD2K0085		1500APP0085	1500AGPP0085	PBT
170	6.69	1500BUP0170	1500BG1UP0170	1500BD2K0170	1500BG1D2K0170	1500BPP0170	1500BG1PP0170	POLYPROPYLENE (PBT on request)
255	10.04	1500BUP0255	1500BG1UP0255	1500BD2K0255	1500BG1D2K0255	1500BPP0255	1500BG1PP0255	
340	13.39	1500BUP0340	1500BG1UP0340	1500BD2K0340	1500BG1D2K0340	1500BPP0340	1500BG1PP0340	
425	16.73	1500BUP0425	1500BG1UP0425	1500BD2K0425	1500BG1D2K0425	1500BPP0425	1500BG1PP0425	
510	20.08	1500BUP0510	1500BG1UP0510	1500BD2K0510	1500BG1D2K0510	1500BPP0510	1500BG1PP0510	
595	23.43	1500BUP0595	1500BG1UP0595	1500BD2K0595	1500BG1D2K0595	1500BPP0595	1500BG1PP0595	
680	26.77	1500BUP0680	1500BG1UP0680	1500BD2K0680	1500BG1D2K0680	1500BPP0680	1500BG1PP0680	
765	30.12	1500BUP0765	1500BG1UP0765	1500BD2K0765	1500BG1D2K0765	1500BPP0765	1500BG1PP0765	
850	33.46	1500BUP0850	1500BG1UP0850	1500BD2K0850	1500BG1D2K0850	1500BPP0850	1500BG1PP0850	
935	36.81	1500BUP0935	1500BG1UP0935	1500BD2K0935	1500BG1D2K0935	1500BPP0935	1500BG1PP0935	
1020	40.16	1500BUP1020	1500BG1UP1020	1500BD2K1020	1500BG1D2K1020	1500BPP1020	1500BG1PP1020	

⁽¹⁾ ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belt wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
 To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
 Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "1500BUP1105".



Standard packaging:
 Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
 Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.


1" Pitch
8,7 mm (0.343") THICKNESS
FLUSH GRID

This belt has an excellent combination of open and support areas to allow drainage of liquids and good support of the conveyed product. This belt is particularly suitable for conveying of aluminium cans.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 21600 N/m (1,480 lbs/ft) for **e-FAST** materials
- **Belt weight:** 6,58 kg/m² (1.58 lbs/ft²) for **e-FAST** materials



VERSION WITHOUT TRACKING GUIDE

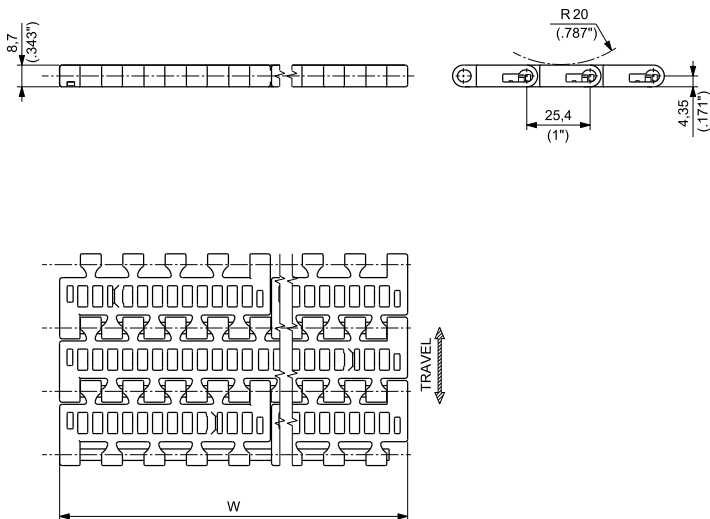

VERSION WITH TRACKING GUIDE

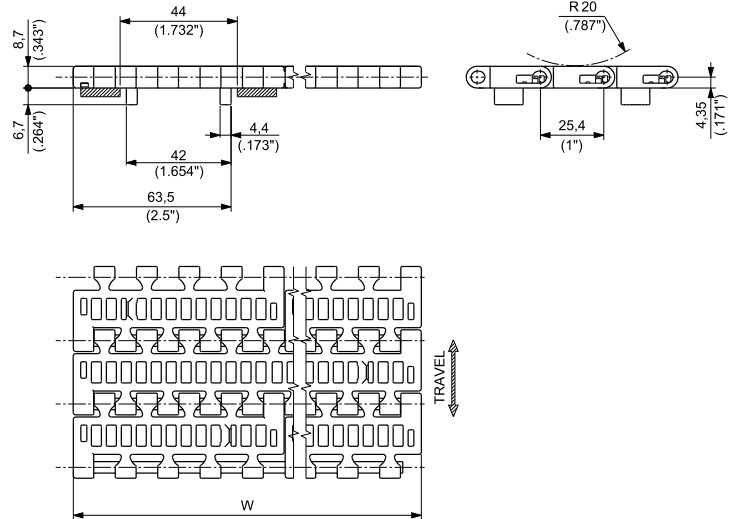

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

WIDTH W		MATERIALS		
		Module	Pin	
		NEW e-FAST ECOLOGICAL FRICTION ABATING THERMOPLASTIC	PBT	
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE		WITH TRACKING GUIDE
85	3.35	1500AEF0085		1500AGEF0085
170	6.69	1500AEF0170	1500AG1EF0170	
255	10.04	1500AEF0255	1500AG1EF0255	
340	13.39	1500AEF0340	1500AG1EF0340	
425	16.73	1500AEF0425	1500AG1EF0425	
510	20.08	1500AEF0510	1500AG1EF0510	
595	23.43	1500AEF0595	1500AG1EF0595	
680	26.77	1500AEF0680	1500AG1EF0680	
765	30.12	1500AEF0765	1500AG1EF0765	
850	33.46	1500AEF0850	1500AG1EF0850	
935	36.81	1500AEF0935	1500AG1EF0935	
1020	40.16	1500AEF1020	1500AG1EF1020	

Belt wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
 To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
 Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for EF material is "1500AEF1105".



Standard packaging:
 Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
 Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.