





TAB
REDUCED SIDE FLEXING RADIUS
REINFORCED TOP PLATE
PITCH 1 1/2" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 42,9 mm (1.689")



Materials
see page 12

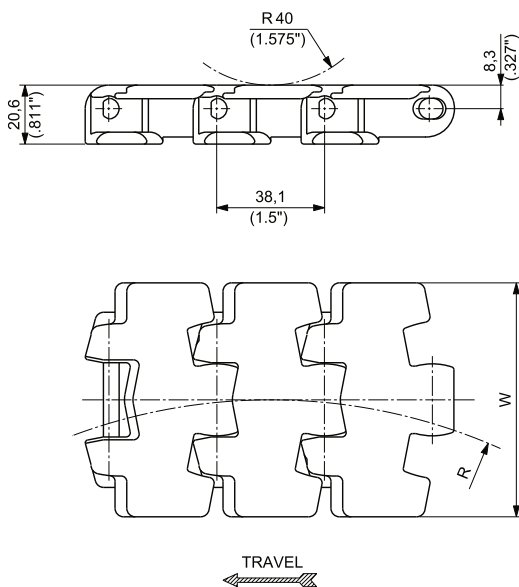

Sprockets
see pages 147+149



Corner tracks
see page 334



Applications
see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDE FLEXING RADIUS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRAPERFORMANCE HOMOPOLYMER DELTRIN® UP	AUSTENITIC STAINLESS STEEL	UP 878T K 3 1/4	UP878TKD/000	82,6	3.25	4,8	0.19	200	7.87	2000	450	1,08	0.73
SPECIAL DELTRIN® REINFORCED WITH KEVLAR® D2K	AUSTENITIC STAINLESS STEEL	D2K 878T K 3 1/4	D2K878TKD/000	82,6	3.25	4,8	0.19	200	7.87	2000	450	1,06	0.71
ABRASION RESISTANT POLYAMIDE AR	AUSTENITIC STAINLESS STEEL	AR878T K 3 1/4	AR878TKD/000	82,6	3.25	4,8	0.19	200	7.87	2000	450	0,89	0.60