

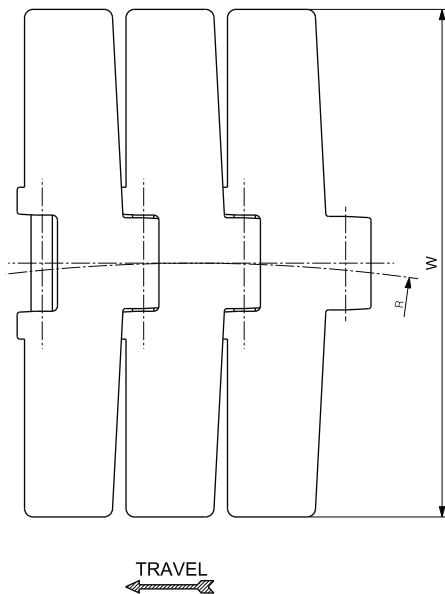


**MAGNETIC
HEAVY DUTY SINGLEHINGE
REINFORCED TOP PLATE
PITCH 1 1/2"(38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")**

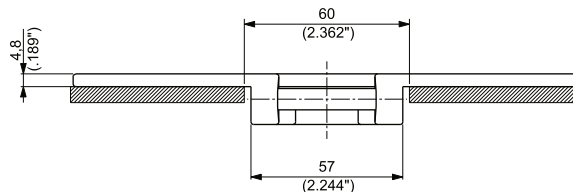

Materials
see page 12

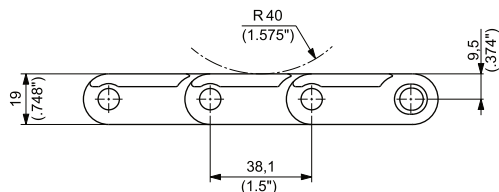

Sprockets
see pages 150+151



Corner tracks
see pages 294



Applications
see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDE FLEXING RADIUS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	R inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	MAGNETIC STAINLESS STEEL	UP 882M K 7 1/2	UP882MKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,21	1.48
		UP 882M K 10	UP882MKM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	2,52	1.69
		UP 882M K 12	UP882MKN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	2,76	1.85