
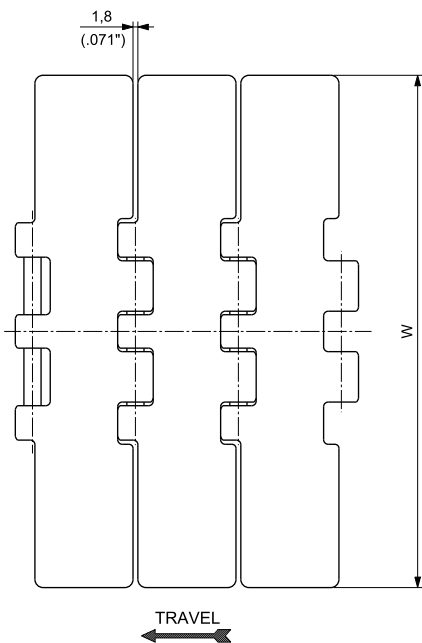
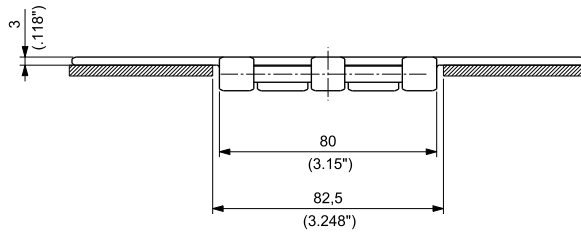


DOUBLEHINGE

PITCH 1 1/2" (38,1 mm)

THICKNESS 3 mm (0.118")

HINGE 80 mm (3.150")



Materials
see page 12



Sprockets
see pages 128+131



Applications
see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH Ra	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch			N	lbs	kg/m	lbs/ft
CARBON STEEL S	CASEHARDENED STEEL	S2815 K 7 1/2	S2815KL/000	190,5	7.50	0,3	NO	18000	4,046	5,56	3.73
FERRITIC STAINLESSSTEEL SS4	AUSTENITIC STAINLESSSTEEL	SS2815-4 K 7 1/2	SS28154KL/000	190,5	7.50	0,3	NO	10300	2,315	5,58	3.75
AUSTENITIC STAINLESSSTEEL SS	AUSTENITIC STAINLESSSTEEL	SS2815 K 7 1/2	SS2815KL/000	190,5	7.50	0,3	NO	10600	2,383	5,61	3.77
PRIMA P	AUSTENITIC STAINLESSSTEEL	P 2815 K 7 1/2	P2815KL/000	190,5	7.50	0,3	NO	15000	3,372	5,60	3.75